



# TIGER P



Universal, two-sided  
emergency lighting fitting

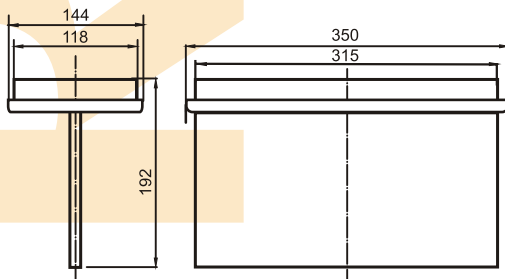

#### Materials:

white polycarbonate body  
transparent polycarbonate cover

#### Mounting:

wall or ceiling or optional: dry-wall or under plastering

#### Specifications:

- 230V 50Hz power supply
- Charge time – 24 hours
- Electric power network and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W
- Insulation class II
- Protection level IP20
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 20 m
- Connecting clips 3x2,5 mm<sup>2</sup>
- Compatibility with standard specifications EN 60598, EN 1838
- Optional PT or RS

#### STANDARD

Configuration of fitting

| type | time [h] |   |   | work |    | option |    |
|------|----------|---|---|------|----|--------|----|
| TP   | 1        | 2 | 3 | SE   | SA | PT     | RS |

#### AUTOTEST

Configuration of fitting

| type | time [h] |   |   | autotest | option |    |
|------|----------|---|---|----------|--------|----|
| TP   | 1        | 2 | 3 | AT       | SE     | SA |

#### FOR CENTRAL BATTERY

Configuration of fitting

| type | central bat. |
|------|--------------|
| TP   | CB           |

#### NETWORK

Configuration of fitting

| type | network |
|------|---------|
| TP   | S       |

| power [W] | cap |
|-----------|-----|
| 8         | G5  |

Configuration mode of order code - page 35  
Accessories - page 32  
RUBIC system description - page 6-7

#### LEGEND

SE - NON-MAINTAINED

SA - MAINTAINED

PT - MANUAL TEST BUTTON

RS - RUBIC MONITORING SYSTEM

AT - AUTOTEST

S - NETWORK

CB - FOR CENTRAL BATTERY EVG

TP - TIGER P FITTING